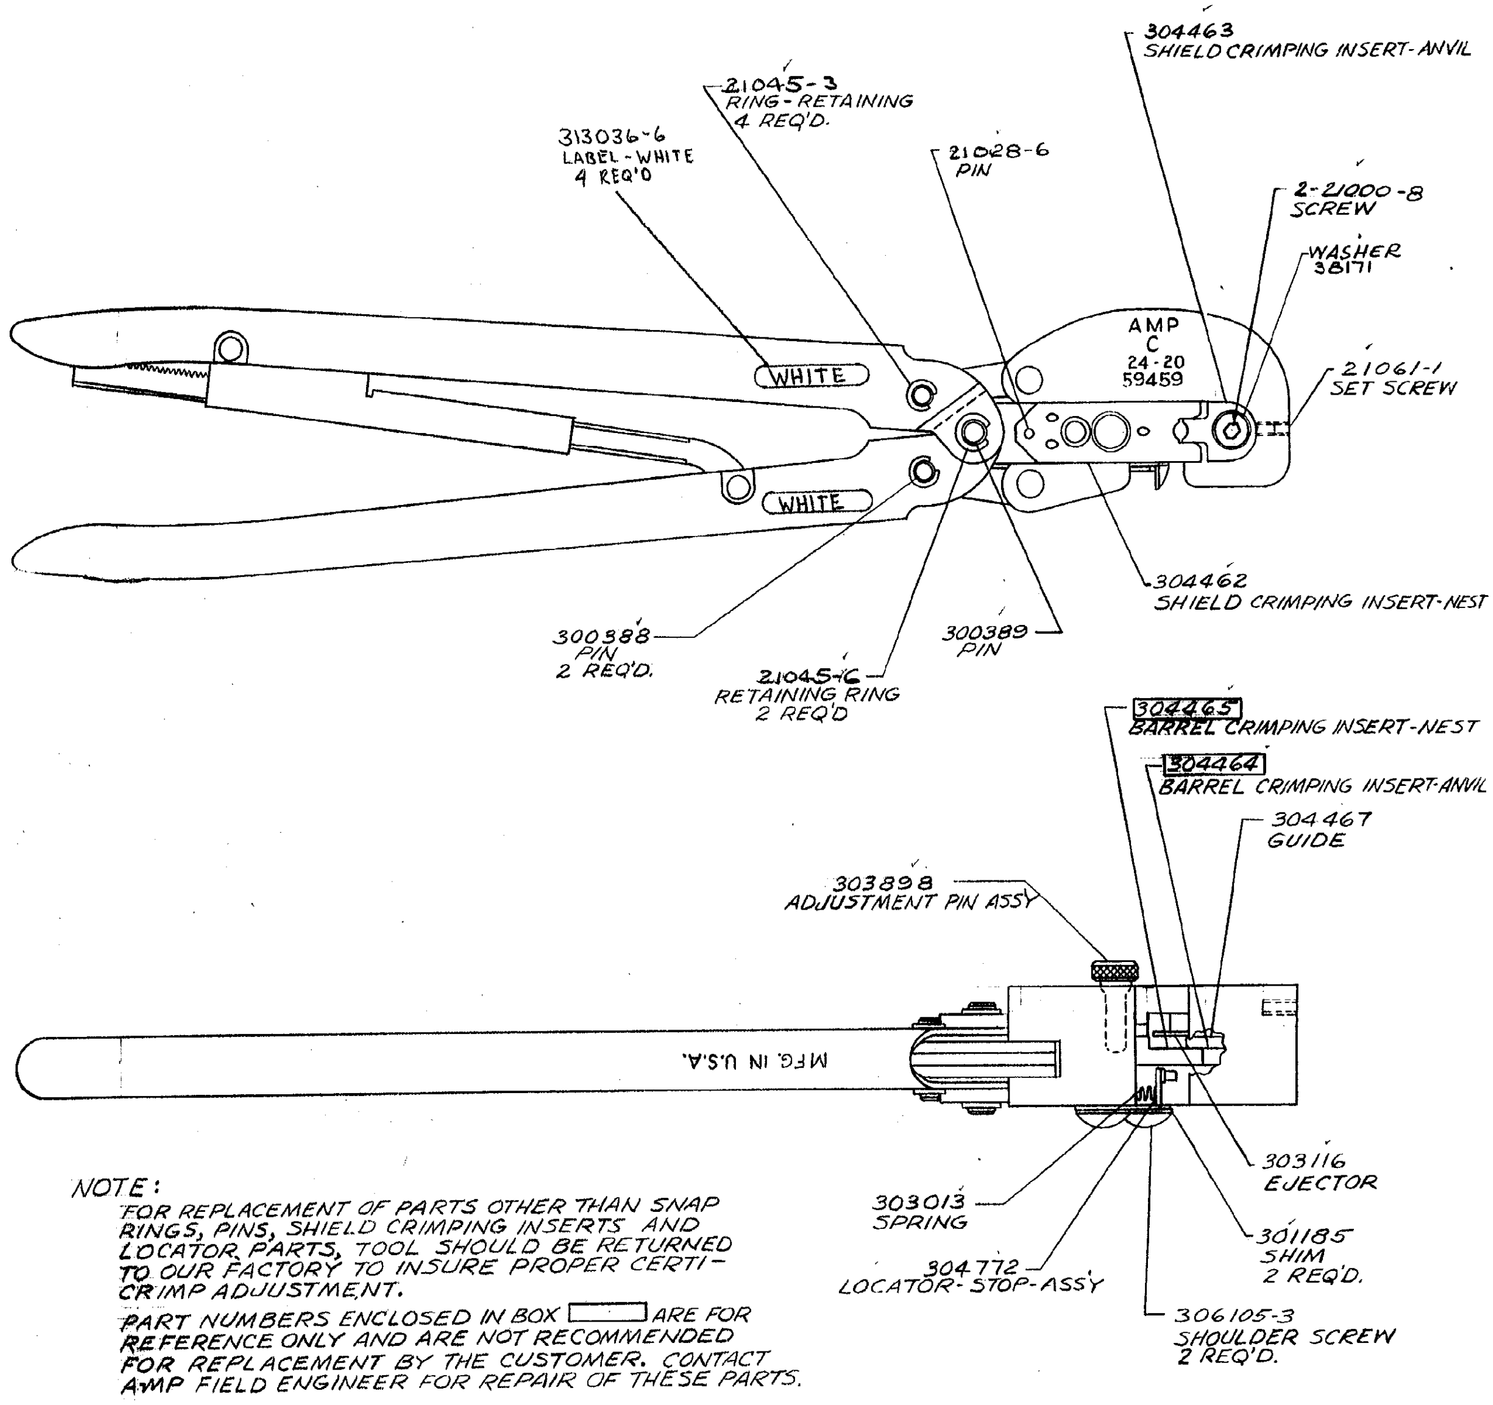

NOTE:
FOR REPLACEMENT OF PARTS OTHER THAN SNAP RINGS, PINS, SHIELD CRIMPING INSERTS AND LOCATOR PARTS, TOOL SHOULD BE RETURNED TO OUR FACTORY TO INSURE PROPER CERTI-CRIMP ADJUSTMENT.

PART NUMBERS ENCLOSED IN BOX ☐ ARE FOR REFERENCE ONLY AND ARE NOT RECOMMENDED FOR REPLACEMENT BY THE CUSTOMER. CONTACT AMP FIELD ENGINEER FOR REPAIR OF THESE PARTS.

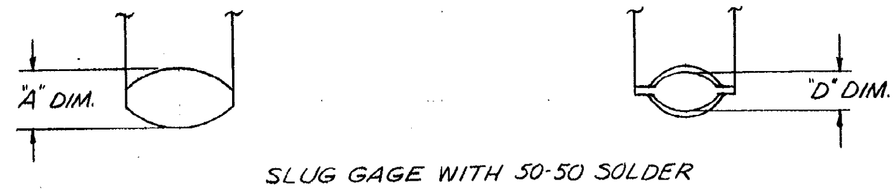

SLUG GAGE WITH 50-50 SOLDER

"A" DIM.		"D" DIM.	
GO	NO GO	PIN AT 0-GO	PIN AT 0-NO GO
.099	.105	.076	.096

59459

USED ON

MATERIAL:
HEAT TREAT:
FINISH: √ EXCEPT AS NOTED:

AMP 280

CUSTOMER COPY
REFERENCE ONLY

© 1959 BY AMP INCORPORATED
ALL RIGHTS RESERVED - AMP PRODUCTS COVERED BY PATENTS AND/OR PATENTS PENDING.

AMP INCORPORATED
HARRISBURG, PENNA.

HEAVY HEAD HAND TOOL ASSEMBLY

CLASS SHIELDED WIRE
TYPE "C"
SIZE 24-20

LOC	SIZE	DR. L. OSMAN	DATE 2-10-59	APP'V'D	DATE	SCALE	CATALOG NUMBER	REV
M	C	CKD. J.B. Fesler	2/11/59	E.V.[illegible]	2-13-59	#	59459	S