
PROPRIETARY INFORMATION:	
PROPRIETARY OF GLOBTEK, INC. ANY REPRODUCTION, DISCL	OSUF

RE OR USE OF THIS DRAWING, IN WHOLE OR IN PART, IS HEREBY PROHIBITED EXCEPT AS SPECIFIED IN WRITING BY GLOBTEK, INC.

REVISION							
REV	DESCRIPTION	DATE	APPROVED				
A	INITIAL RELEASE, RFS. 22053	12/12/11	HM				
В	CHANGE PACKING TO BULK, RFS. 22645, EM	03/23/12	HM				
С	UPDATE PACKING TO 'NO BUNDLES, RFS. 22725, EM	04/04/12	HM				

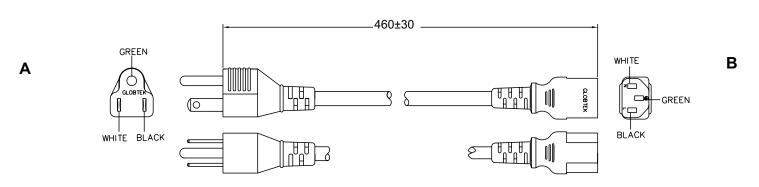

PACKING:

BULK PACK, NO BUNDLES, NO HANK, NO TIE

GENERAL SPECIFICATIONS:

RATING: 10A / 125V AC CABLE TYPE / SIZE: **SVT. 18 AWG X 3**

105° C TEMPERATURE RATING:

CONDUCTOR COLORS: BLACK / WHITE / GREEN

CABLE JACKET COLOR: **BLACK**

OVERALL LENGTH (L): 460 + 30 mm CABLE OUTER DIAMETER: 6.3 + 0.1 mmEND 'A' TERMINATION: **NEMA 5-15P** END 'B' TERMINATION: IEC 320 / C13 APPROVALS PLUG: UL. CSA or cUL APPROVALS CABLE: UL, CSA or cUL APPROVALS CONNECTOR: UL, CSA or cUL

NOTES:

1. CORD. PLUG AND CONNECTOR MUST BE MARKED WITH APPROVAL SYMBOLS OR FILE NUMBER(S).









		Foot Note:			
		Globtek Inc. will not be liable for the			
ı	C Cdi l	safety and performance of these power product if unauthorized access and repair occurs. End user should consult the applica			
	are subject to change without				
	prior notice	ble UL,CSA or EN Standards for proper installation instruction.			

Globtek product are not authorized for use as mission critical components in life support, hazardous environment, nuclear or aircraft applications without prior written approval from the CEO of Globtek Inc.

DASH NO.]	PART NO	REV.		NOTES				
TABULATION BLOCK									
			ANGULAR +/- 1°	G		obTek, Inc.	186 Veterans Dr. No. Tel. 201-784-1000		
INIT.BY:	EM	DATE: 12/12/11	MILLIMETER .xx +/- 0.3 .xxx +/013	S ANGULAR +/- 1°	DWG TIT	LE:	NORTH AMERICAN 1.5 FEET, NEMA5-15	DETACHABLE CORD P TO IEC320/C13	OSET,
DRAWN	: NF	DATE: 12/12/11	FSCN No.: G, CC	SIZE A	MODEL:	N	I / A		REV. C
APRVD:	НМ	DATE: 12/12/11	SCALE: NONE		PART NO):	3021451F5701(R)		SHEET 1/1