SR48UBDPWD

SmartRack[™] Deep & Wide Rack Enclosure



48 Rack Units



3000 lb Stationary **Load Rating**



2250 lb Rolling **Load Rating**



Heavy-Duty Casters



Locking Doors Accommodates & Side Panels



Standard Mounting Slots 19-inch Equipment



Toolless

Adjustable Rails with **Easy-View**



Exceeds Server OEM Requirements




Integrated **Baying Tabs**



Square Hole Mounting

- A Adjustable Mounting Rails
- **B** Adjustable PDU Mounting **Rails with Toolless Mounting Slots**
- Roof Panel (Removable)
- **D** Front Door (Lockable/Removable/Reversible)
- **E** Split Rear Doors (Lockable/Removable)
- F Side Panels (Lockable/Removable)
- **G** Heavy-Duty Casters
- **H** Heavy-Duty Levelers
- Keys (For doors and side panels)

Also Includes: Owner's manual, 2 stabilizing brackets and rackmount equipment mounting hardware (50 cage nuts, 50 mounting screws, 50 nylon cup washers)

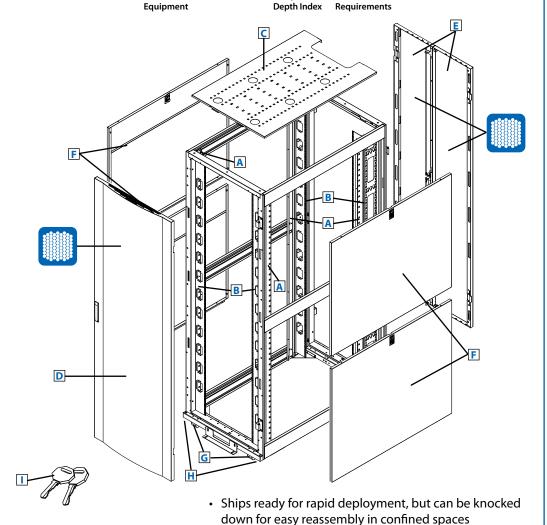

and reconfiguration

applications









Specifications

Model	SR48UBDPWD
Rack Spaces	48U
Stationary Load Rating	3000 lb (1363 kg)
Rolling Load Rating	2250 lb (1022 kg)
Unit Dimensions (H x W x D)	89 x 29.53 x 47.25 in. (2261 x 750 x 1200 mm)
Shipping Dimensions (H x W x D)	95 x 32 x 52.75 in. (2413 x 813 x 1340 mm)
Unit Weight	378 lb (171 kg)
Shipping Weight	440 (200 kg)
Certifications	Tested to UL 60950, TIA/EIA-310-E, NOM, RoHS (Accommodates all standard 19-inch rackmount equipment regardless of vendor.)

Tripp Lite has a policy of continuous improvement. Specifications are subject to change without notice.


SEE NEXT PAGE FOR DETAILED UNIT MEASUREMENTS


Modular design optimized for quick configuration

Ideal for rackmount server, network and telecom



1111 W. 35th Street Chicago, IL 60609 USA 773.869.1234 www.tripplite.com

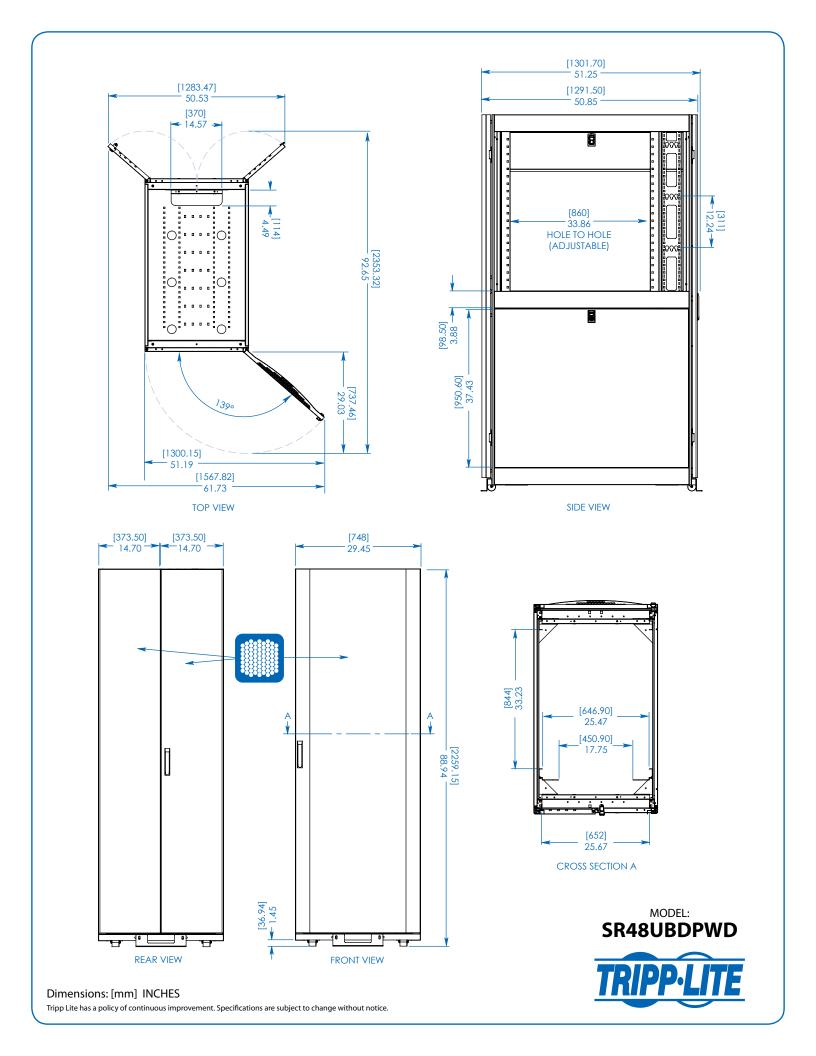

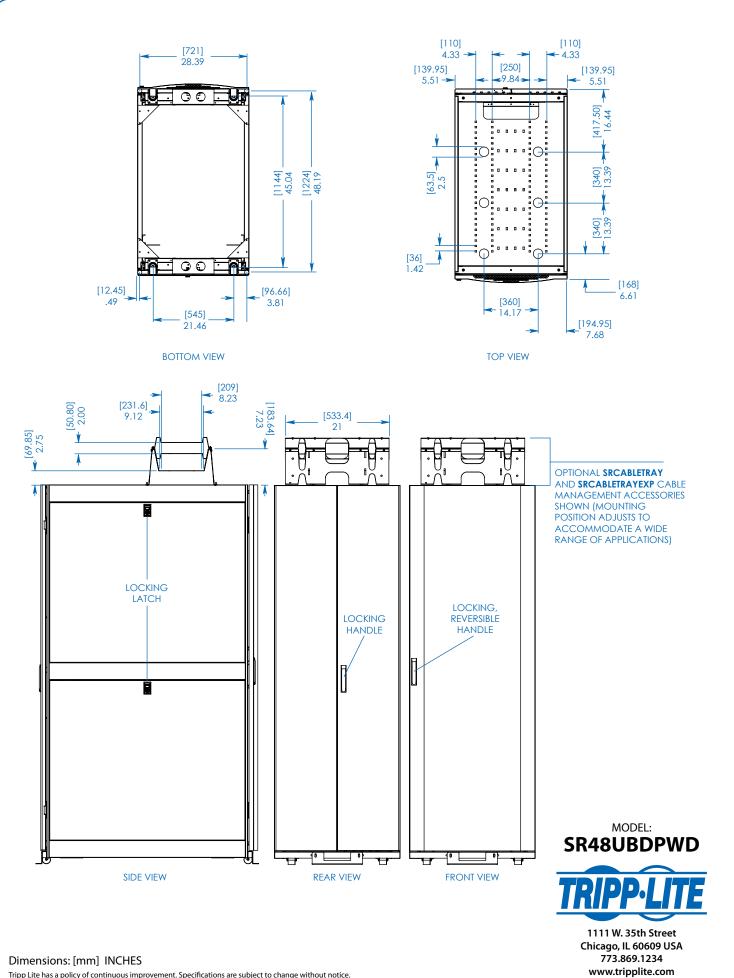

Tripp Lite has a policy of continuous improvement. Specifications are subject to change without notice.